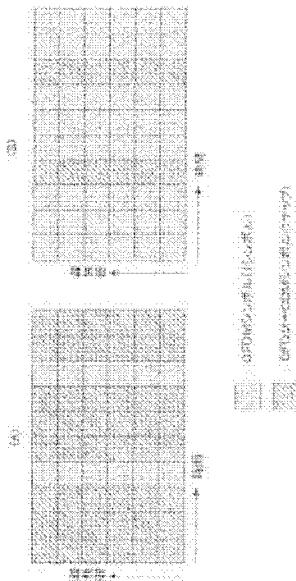


RADIO COMMUNICATIONS APPARATUS AND RADIO COMMUNICATION METHOD**Publication number:** JP2008072733 (A)**Also published as:****Publication date:** 2008-03-27

JP4247288 (B2)

Inventor(s): MURAKAMI YUTAKA; TAKABAYASHI SHINICHIRO; ORIHASHI MASAYUKI; MATSUOKA AKIHIKO +**Applicant(s):** MATSUSHITA ELECTRIC IND CO LTD +**Classification:****- international:** H04J11/00; H04B1/707; H04B7/26; H04Q7/36; H04J11/00; H04B1/707; H04B7/26; H04Q7/36**- European:****Application number:** JP20070262556 20071005**Priority number(s):** JP20010257027 20010827; JP20070262556 20071005**Abstract of JP 2008072733 (A)**

PROBLEM TO BE SOLVED: To provide a radio base station device and a radio communication method excellent in high-quality transmission and high-speed transmission. ; **SOLUTION:** Orthogonal frequency division multiplex processing is performed on a transmission signal to form an OFDM modulation signal (daubed in FIG.) and orthogonal frequency division multiplex processing and code division multiple access processing are performed on a transmission signal to form an OFDM-CDMA modulation signal (shaded in FIG.) to transmit the OFDM modulation signal and the OFDM-CDMA modulation signal, which makes it possible to transmit data at a very high rate by using the OFDM modulation while making it possible to transmit data with a higher quality by using the OFDM-CDMA modulation than using the OFDM modulation, although it is slightly inferior to OFDM modulation in terms of high rate transmission. ; **COPYRIGHT:** (C) 2008,JPO&INPIT

Data supplied from the **espacenet** database — Worldwide